

Solid prefinished parquet

speed of installation
simplicity of installation
lifespan / durability
attractive prices
under floor heating
product range
possibility of refinishing
warmth / character



Solid parquet has all advantages of wooden flooring. Wood is one of the oldest and most appreciated material, used for the flooring. It has distinctive, unique natural structure and colour. Solid parquet is an investment for several generations. Its thickness allows it to be renewed (sanded) several times. Boards are of different dimensions. Lengths range from 400 mm to 1500 mm, widths from 82 mm to 120 mm and thicknesses from 18 mm to 20 mm. Solid parquet has to be fully glued to the surface. All parquets are already sanded and varnished or oiled. Some of them have also additional treatments, such as brushing, handscraping, etc. Varnishes and oils are hardened with UV rays. The bevelled edges of the planks additionally emphasize distinctive wood structure.

Tehnickal data:

plank dimension	different
underfloor heating	unsuitable
installation	fully glued on the surface
durability	renewable

Tongue+groove system





SOLID PREFINISHED PARQUET - OAK



OAK AB



OAK ABCD



**OAK ABCD, LIGHT SMOKED,
OIL**



**OAK BRUSHED, BLACK EDGES
AND PORE**



OAK BRUSHED, 002



OAK BRUSHED, 003 COGNAC



**OAK ABC BRUSHED,
WHITE WASHED, STIL 1**



**OAK AB, BRUSHED,
WHITE WASHED, STIL 2**




**OAK ABCD, HAND SCRAPED,
WHITE**



OAK ABCD, CRIMSON



**OAK ABCD, HAND SCRAPED,
031**

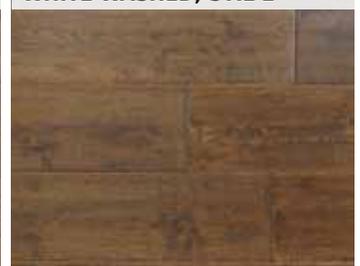

**OAK ABCD, HAND SCRAPED,
COFFE**

Tongue+groove




DL x 83/90/125/150/190 x 18/20 mm



SOLID PREFINISHED PARQUET - of exotic timbers

There is large number of exotic timbers in our solid wood flooring assortment and includes African, Asian and South American wood species. The majority of these wood species is characterized by a high degree of stability, which is especially important for solid wood floorings.

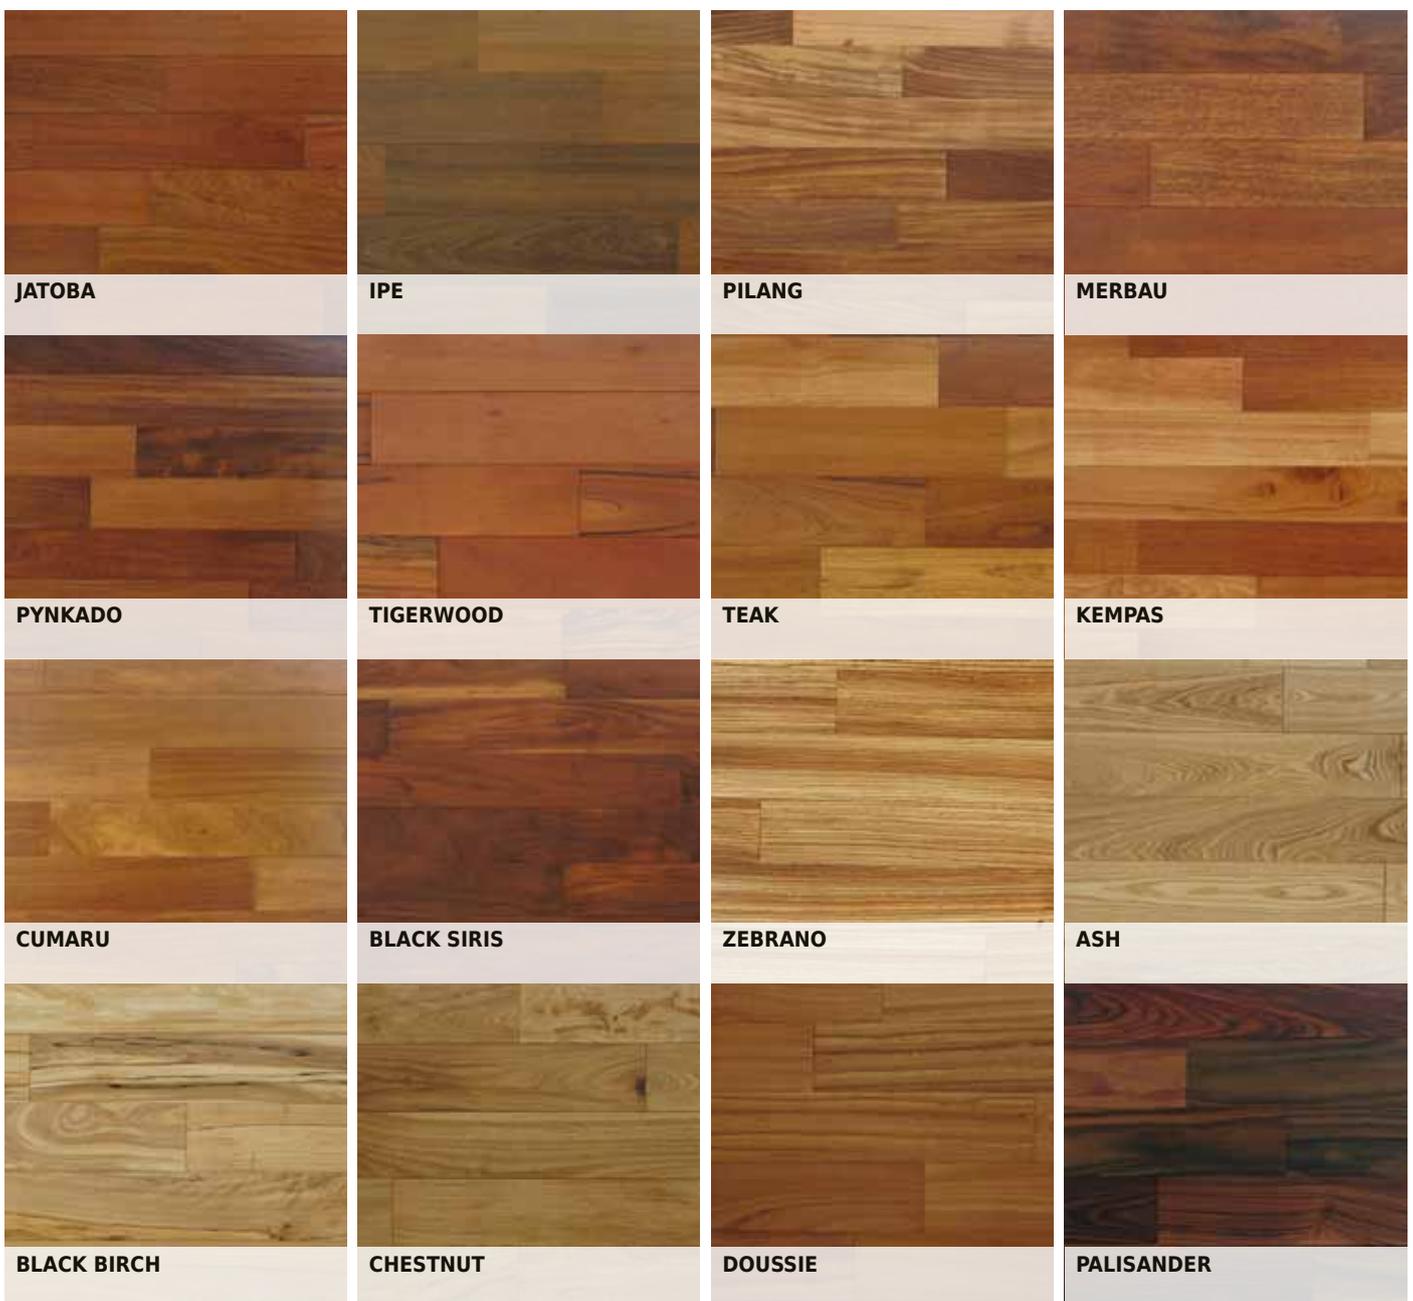

Tongue+groove




DL x 90/91/92/93/120/124 x 15/18 mm



IROKO



ACACIA NATURAL



ASH TERMO WHITE WASHED



MAPLE CANADIAN



KUKU



ASH TIGER




AMERICAN WALNUT



AMERICAN CHERRY



**BAMBOO HORIZONTAL,
MAT WHITE**



**BAMBOO HORIZONTAL TEAK,
LACQUERED**



**BAMBOO VERTICAL DARK,
LACQUERED - UNLACQUERED**



**BAMBOO HORIZONTAL DARK,
LACQUERED - UNLACQUERED**



**BAMBOO VERTICAL,
LACQUERED - UNLACQUERED**




**BAMBOO HORIZONTAL,
LACQUERED - UNLACQUERED**



TEAK MARIN AB

speed of installation
 simplicity of installation
 lifespan / durability
 attractive prices
 under floor heating
 product range
 possibility of refinishing
 warmth / character



SOLID PARQUETS - unfinished

...shows off the original colour and texture of wood. The parquet surface is sanded but not additionally treated and the same lengths are available as with solid prefinished parquet. It has to be fully glued to the surface. Final treatment is a matter of taste and requirements. The parquet's thickness allows it to be sanded many times, which proves an important feature especially in more heavily used spaces. In most cases the parquet blocks have straight rather than angled edges.



AFROMOSIA



BUBINGA



CUMARU



DOUSSIE



GARAPA



LAPACHO



IROKO



JATOBA



ASH ESPRESSO



ASH TIGER



TIGERWOOD



SYCAMORE



SUCUPIRA



TATAJUBA



TAURARI



WENGE

Tongue+groove



400-1200 x 80/100x 14/15 mm



- speed of installation
- simplicity of installation
- lifespan / durability
- attractive prices
- under floor heating
- product range
- possibility of refinishing
- warmth / character

SOLID PARQUETS - industrial floorings

...use raw parquet and, thanks to their special “techno” look. They are composed of small lamellas, 6-10 mm wide, 10-20 mm thick and 200-400 mm long. Their constructional properties make them suitable for heavily used spaces. Due to its narrow width, each lamella may be of a slightly different colour, testifying to the wood's natural richness of texture. Lamellas can be laid either parallel or randomly. The light and dark tones mix together in a colourful mosaic, bringing elegance to offices and cosiness to living rooms. After sanding, parquet can be varnished or oiled.



ZEBRANO



DOUSSIE




WENGE



ACACIA STAMED



BIRCH HONEY



SONOKELLING




ASH ESPRESSO



ASH TIGER



KEMPAS



MERBAU




TEAK



OAK



Straight joint



160-420 x 210-360x 14-23 mm